
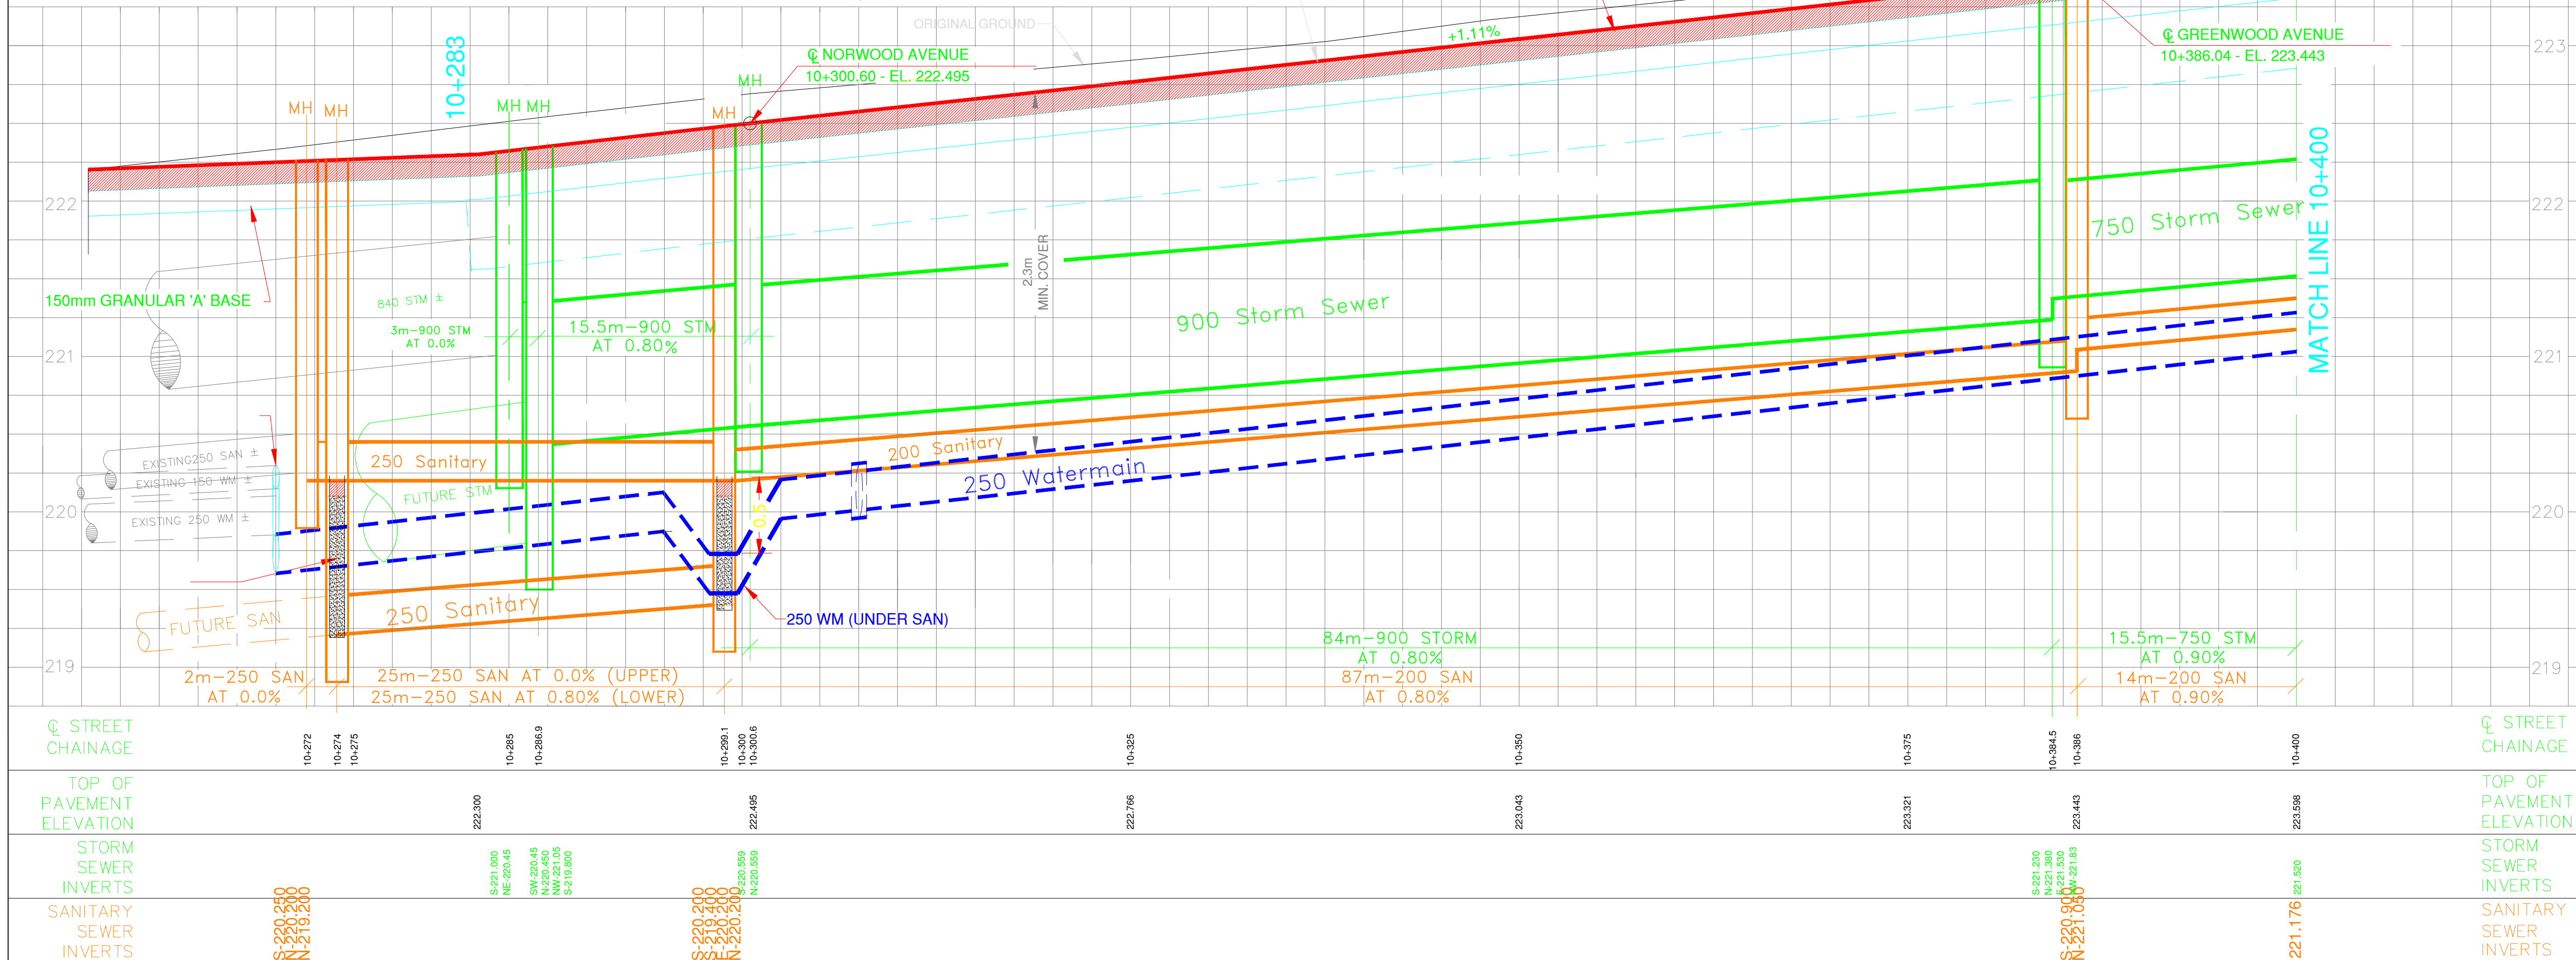


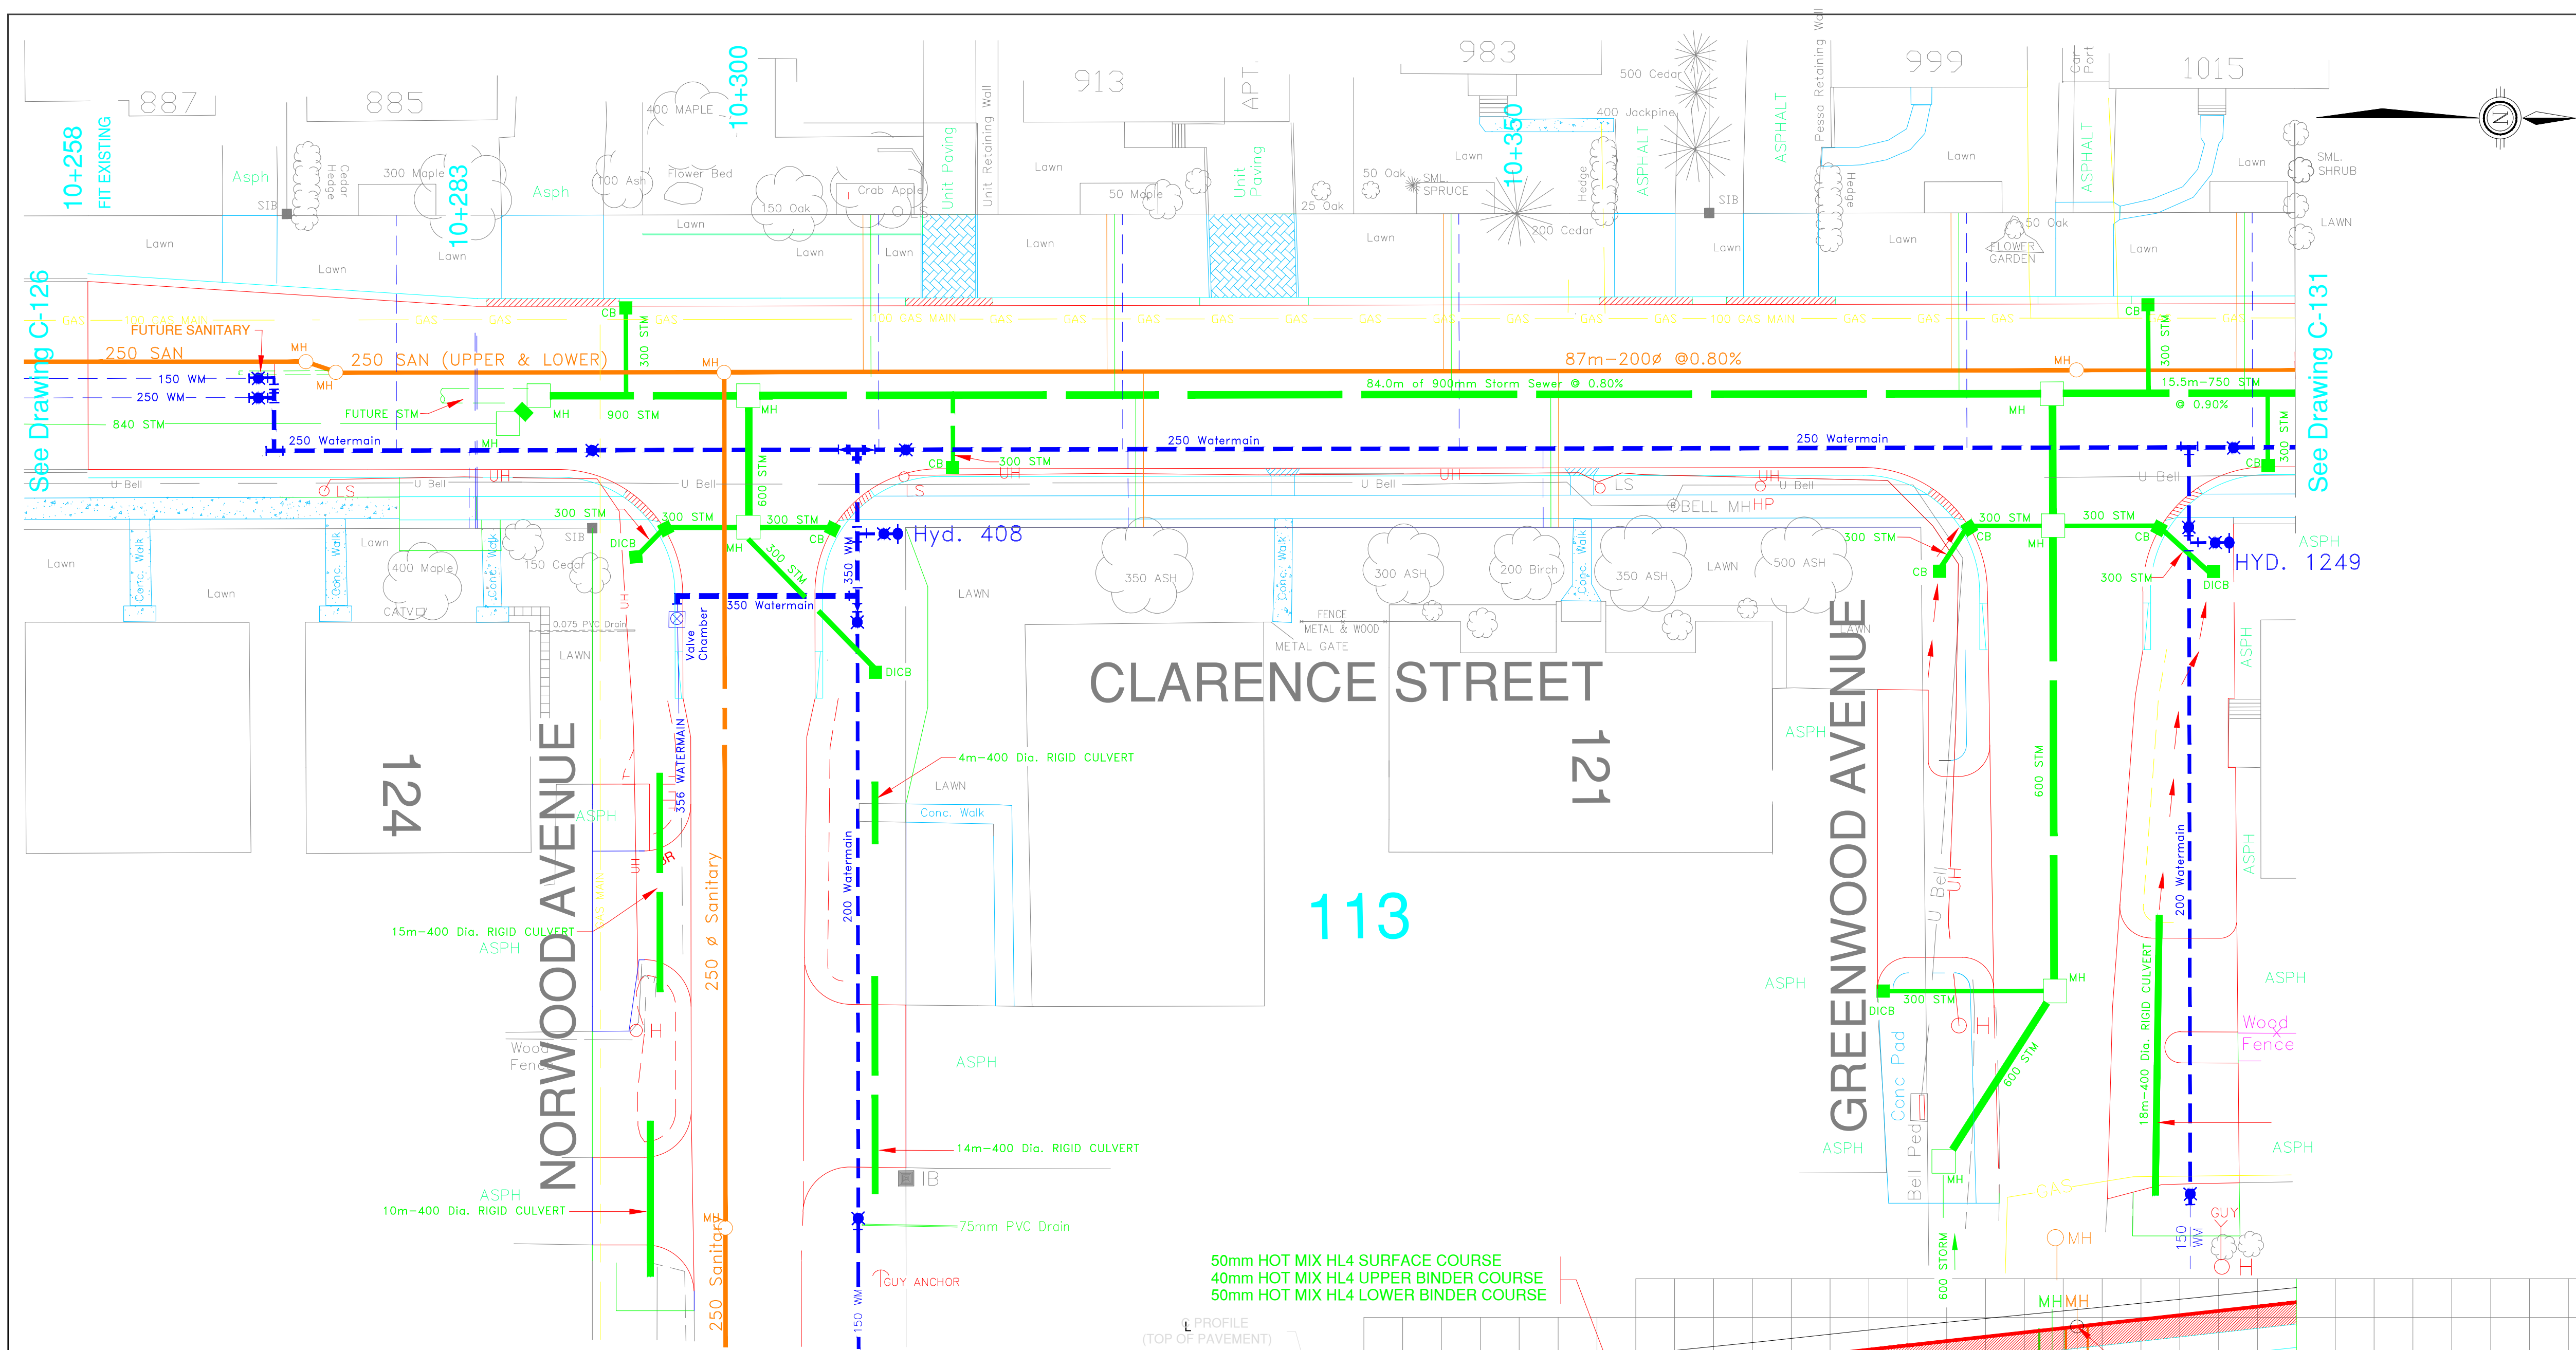


- NOTES:
1. THE LOCATIONS AS WELL AS THE COMPLETENESS OF THE EXISTING UNDERGROUND UTILITIES AS SHOWN ARE APPROXIMATE. EXCAVATION TO DETERMINE ACTUAL LOCATIONS MAY BE REQUIRED PRIOR TO INSTALLATION OF PORTIONS OF THIS PROJECT.
 2. NUMEROUS SANITARY AND WATER SERVICE CONNECTIONS EXIST TO PROPERTIES ALONG THE WORKS AS WELL AS GAS, HYDRO, BELL & CABLE TV SERVICES. ALL ACTIVE SANITARY, WATER, GAS, HYDRO, BELL AND CATV SERVICES SHALL BE MAINTAINED UNLESS DIRECTED OTHERWISE.
 3. WHERE ANY WATERMAIN CROSSES ABOVE A SEWER (STORM OR SANITARY) AND WITHIN 150mm, THE WATERMAIN SHALL BE BEDDED WITH LEAN CONCRETE THE FULL WIDTH OF THE TRENCH AND TO 1m FROM THE CENTRELINE OF THE SEWER.
 4. WHERE ANY WATERMAIN CROSSES BELOW A SEWER (STORM OR SANITARY) 0.50m MINIMUM CLEAR SEPARATION SHALL BE ENSURED. ALSO THE WATERMAIN COVER MATERIAL SHALL EXTEND UP TO THE BOTTOM OF THE SEWER BEDDING. AS WELL PIPE JOINTS IN BOTH THE WATERMAIN AND THE SEWER SHALL BE KEPT AS FAR APART AS IS PRACTICAL.
 5. ALL AREAS DISTURBED BY GRADING OPERATIONS SHALL BE TOP-SOILED AND SODDED UNLESS INDICATED OTHERWISE. PAVED AREAS DISTURBED SHALL BE RESTORED WITH NEW PAVEMENTS.
 6. CONCRETE CURB AND GUTTER TO BE AS PER OPSD 600.04 TANGENT SECTION TO BE USED UNLESS INDICATED OTHERWISE.
 7. RESTORE UNIT PAVEMENT DRIVEWAYS WITH SALVAGED UNIT PAVERS.
 8. DAMAGE TO ROOT MAT AND FOLIAGE OF TREES ALONG THE ROUTE BUT ON PRIVATE PROPERTY WILL NOT BE TOLERATED.
 9. EXISTING LIGHT STANDARDS ARE TO REMAIN IN PLACE. THEY ARE SECTIONAL STEEL POLES. DIRECT BURY.
 10. PROVIDE SANITARY, STORM AND WATER SERVICES TO ALL PROPERTIES ALONG CLARENCE STREET.

ADDENDUM No 1
JUNE 1, 1999

Disclaimer

The information contained on this drawing may be based upon data provided by others and may not have been verified by either as-constructed drawings or an Ontario Land Surveyor. The City of North Bay cannot accept responsibility for any errors or omissions on any information shown herein. Field verification, land surveys or excavation (with City approvals) may be required to determine actual location of any and all utilities or property lines.



R.E.A. ADDENDUM NO. 1		JUNE1,1999	
APP'D BY	DETAILS	DATE	No
REVISIONS			
RECOMMENDED BY		APPROVED BY	
CITY OF NORTH BAY			
SANITARY SEWER, WATERMAINS AND ROAD RECONSTRUCTION — PHASE 1			
NORWOOD AVENUE TO TACKABERRY DRIVE			
WATERMAIN & CLARENCE STREET RECONSTRUCTION			
PART A — CLARENCE STREET RECONSTRUCTION			
CLARENCE STREET			
NEW—CONSTRUCTION — PROFILE			
FROM 50m SOUTH OF NORWOOD AVENUE			
TO 14m NORTH OF GREENWOOD AVENUE			
northland engineering limited			
Consulting Engineers and Planners			
NORTH BAY		SUBURRY	
DRAWN BY: R.E.A./M.W.M.		DATE: AUG. 1998	
CHECKED BY: R.E.A.		SCALE: HORIZ. 1 : 250 VERT. 1 : 25	
CAD FILE: 4341nc_3			
OFFICE	PROJECT No	DRAWING No	REV.
NORTH BAY	CNB-1999-54	C-130	1